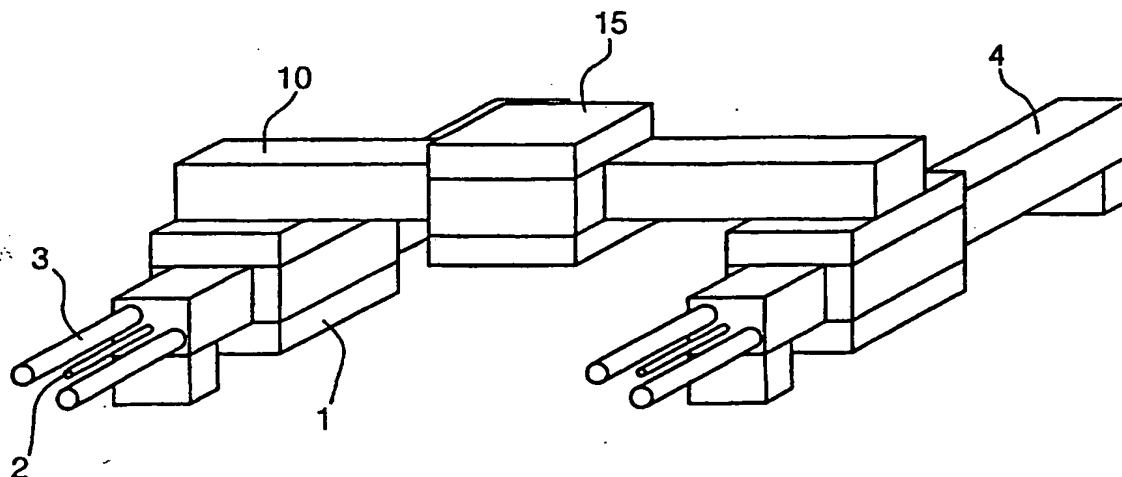


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|--|-----------|--|
| (51) International Patent Classification 7 : F16C 32/06 | A1 | (11) International Publication Number: WO 00/49303 (43) International Publication Date: 24 August 2000 (24.08.00) |
| <p>(21) International Application Number: PCT/US00/04223</p> <p>(22) International Filing Date: 18 February 2000 (18.02.00)</p> <p>(30) Priority Data: 11/41774 19 February 1999 (19.02.99) JP</p> <p>(71) Applicants (for all designated States except US): NIKON CORPORATION [JP/JP]; Fuji Building, 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-8331 (JP). TOTO LTD. [JP/JP]; 1-1, Nakashima 2-chome, Kokura-kita-ku, Kita-kyushu-shi, Fukuoka 802-8601 (JP).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): TSUDA, Takuma [JP/JP]; Toto Ltd., 1-1, Nakashima 2-chome, Kokura-kita-ku, Kita-Kyushu-shi, Fukuoka 802-8601 (JP). SHINOHARA, Shinji [JP/JP]; Toto Ltd., 1-1, Nakashima 2-chome, Kokura-kita-ku, Kita-Kyushu-shi, Fukuoka 802-8601 (JP). TOKUSHIMA, Shinobu [JP/JP]; Nikon Corporation, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-8331 (JP). OKUBO, Yukiharu [JP/JP]; Nikon Corporation, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-8331 (JP). SHIMODA, Toshimasa [JP/JP]; Nikon Corporation, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-8331 (JP). WATSON, Douglas</p> | | <p>[US/US]; Nikon Corporation, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-8331 (JP).</p> <p>(74) Agents: OLIFF, James, A. et al.; Oliff & Berridge, PLC, P.O. Box 19928, Alexandria, VA 22320 (US).</p> <p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p> |

(54) Title: **STATIC PRESSURE AIR BEARING**

(57) Abstract

In an air pressure bearing having two axes, air exhaust pipes (3) are connected only with the fixed parts (4) of the lower axis.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|---------------------|----|-----------------------|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | | Republic of Macedonia | TR | Turkey |
| BG | Bulgaria | HU | Hungary | ML | Mali | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MN | Mongolia | UA | Ukraine |
| BR | Brazil | IL | Israel | MR | Mauritania | UG | Uganda |
| BY | Belarus | IS | Iceland | MW | Malawi | US | United States of America |
| CA | Canada | IT | Italy | MX | Mexico | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NE | Niger | VN | Viet Nam |
| CG | Congo | KE | Kenya | NL | Netherlands | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NO | Norway | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's | NZ | New Zealand | | |
| CM | Cameroon | | Republic of Korea | PL | Poland | | |
| CN | China | KR | Republic of Korea | PT | Portugal | | |
| CU | Cuba | KZ | Kazakhstan | RO | Romania | | |
| CZ | Czech Republic | LC | Saint Lucia | RU | Russian Federation | | |
| DE | Germany | LI | Liechtenstein | SD | Sudan | | |
| DK | Denmark | LK | Sri Lanka | SE | Sweden | | |
| EE | Estonia | LR | Liberia | SG | Singapore | | |

STATIC PRESSURE AIR BEARING

BACKGROUND OF THE INVENTION1. Field of Invention

5 The present invention relates to a static pressure air bearing having two axes, a lower axis and an upper axis, used in a vacuum environment.

2. Description of Related Art

Conventional static pressure air bearings having two axes used in a vacuum environment have been provided with air exhaust pipes connected with the movable part of each axis bearing mechanism. That is, each axis has its own dedicated air exhaust pipes, which are connected to the movable part of each axis. Therefore, air exhaust from each axis bearing has been separately done.

The conventional air exhaust method requires, with respect to the upper axis, the connection of the air exhaust pipe with the movable part of the upper axis bearing mechanism. Additionally, a large bore diameter of the pipe is required to obtain efficient air exhaust displacement. These features cause a great resistance to the feeding motion of the bearing and seriously affect the bearing performance. This problem arises when the air exhaust pipe is connected with the movable part of the upper axis, and also arises when the air exhaust pipe is connected with inner piping formed within a fixed part of the upper axis (because the fixed part of the upper axis also moves).

SUMMARY OF THE INVENTION

The present invention provides a static pressure air bearing having two axes usable in a vacuum environment in which the connection of the supporting air exhaust pipe does not adversely affect the motion of the bearing mechanism.

25 To accomplish the above and/or others objects, according to one aspect of the present invention, there is provided a static pressure air bearing having two axes, a lower axis and an upper axis, in which inner air exhaust piping formed within a fixed part of the lower axis and inner air exhaust piping formed within a fixed part of the upper axis (which is fixed on a movable part of the lower axis) communicate with each other.

30 Through the implementation of the above configuration, the air exhaust pipe can be connected only with the fixed part of the lower axis and need not be directly

connected with the movable parts of the bearing mechanism. Consequently, an air exhaust pipe of a large bore diameter does not adversely affect the bearing performance.

5 In a preferred embodiment of the present invention, the communication between the inner air exhaust piping of the fixed part of the lower axis and the inner air exhaust piping of the fixed part of the upper axis is provided through air exhaust communication grooves and air exhaust communication piping formed within the movable part of the lower axis. Through the implementation of the above configuration, the air exhaust pipe need not be connected directly with the fixed part
10 of the upper axis. Thus, because there is no connection of the air exhaust pipe with any of the moving parts of the bearing mechanism, the air exhaust pipe does not adversely affect the bearing performance, e.g., rectilinear feeding accuracy.

In a preferred embodiment of the present invention, the supporting air is exhausted through the inner air exhaust piping formed within the fixed parts of the
15 lower and upper axes. Through the above configuration, the air exhaust pipe need not be connected either with the movable part of the lower axis or with the movable part of the upper axis.

In a preferred embodiment of the present invention, air exhaust grooves are disposed surrounding each air pad of the lower and upper axes. Through the above
20 configuration, because only a limited amount of air can flow into the vacuum chamber from the gap of the bearing, the bearing is usable in a vacuum environment.

In a preferred embodiment of the present invention, air supply structure is also accommodated in the fixed parts. That is, inner air supply piping formed within the fixed part of the lower axis and inner air supply piping formed within the fixed part of
25 the upper axis (which is attached to the movable part of the lower axis) communicate with each other. Through the above configuration, because both the air supply and the air exhaust are done within the fixed parts, tubing connection with the movable parts can also be avoided.

BRIEF DESCRIPTION OF THE DRAWINGS

30 The invention will be described in conjunction with the following diagrams in which like reference numerals designate like elements and wherein:

Fig. 1 is a perspective view showing an embodiment of a static pressure bearing mechanism according to the present invention;

Fig. 2 is a sectional view of part of the static pressure air bearing mechanism shown in Fig. 1;

Fig. 2(a) is a sectional view of the Fig. 1 static pressure air bearing mechanism;

5 Fig. 2(b) is a sectional view like Fig. 2(a), but shows the movable part of the upper axis moved to its left-most position;

Fig. 2(c) is a plan view of the surface of the fixed part of the upper axis, as seen in the direction of arrow C in Fig. 2(b);

10 Fig. 2(d) is a sectional view of the upper axis as seen in the direction of arrow D in Fig. 2(b);

Fig. 2(e) is a sectional view of the upper axis as seen in the direction of arrow E in Fig. 2(b);

Fig. 2(f) is a sectional view like Fig. 2(a);

15 Fig. 2(g) shows the upper surfaces of lower axis fixed parts as seen in the direction of arrow G in Fig. 2(f);

Fig. 2(h) is a plan view of the inner surface of the lower axis movable parts as seen in the direction of arrow H in Fig. 2(f);

Fig. 2(i) is a sectional view like Fig. 2(a);

20 Fig. 2(j) is a sectional view of the lower axis as seen in the direction of arrow J in Fig. 2(i);

Fig. 2(k) is a sectional view like Fig. 2(a);

Fig. 2(l) is a sectional view of the lower axis as seen in the direction of arrow L in Fig. 2(k);

25 Fig. 3 is a cross-sectional view as seen in the direction of arrow A in Fig. 2(a) of the fixed and movable parts of the upper axis;

Fig. 4 is a plan view of the inner surface of the upper axis movable part as seen in the direction of arrow B in Fig. 2(b);

30 Figs. 5(a) and 5(b) are see-through views that show the relative positions of the exhaust grooves, air pads and exhaust apertures of the fixed and movable parts of the respective upper and lower axes when the movable parts are at opposite ends of their respective ranges of movement;

Figs. 5(c), 5(d) and 5(e) show the relative positions between the elements (the air pads and exhaust apertures) on the upper axis fixed part and the corresponding

elements (the exhaust grooves) on the upper axis movable part in an alternative embodiment having two grooves, when the movable part is located at a central position (Fig. 5(c)), a left-most position (Fig. 5(d)) and a right-most position (Fig. 5(e));

5 Fig. 6(a) is a sectional view of a static pressure air bearing mechanism according to an alternative embodiment in which the air pads are provided on the upper and lower axes movable parts;

 Fig. 6(b) is a plan view of the inner surface of the upper axis movable part as seen in the direction of arrow B1 in Fig. 6(a);

10 Fig. 6(c) is a plan view of the upper surface of the upper axis fixed part as seen in the direction of arrow C1 in Fig. 6(a);

 Fig. 7(a) is a sectional view of a static pressure air bearing mechanism having a different air pad architecture from the Fig. 6(a) embodiment;

15 Fig. 7(b) is a plan view of the inner surface of the upper axis movable part as seen in the direction of arrow B2 in Fig. 7(a); and

 Fig. 7(c) is a plan view of the upper surface of the upper axis fixed part as seen in the direction of arrow C2 in Fig. 7(c).

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

20 The disclosed static pressure air bearing can be used in various precision engineering applications where it is desirable to precisely position a workpiece. The workpiece can be, for example, a part to be machined and/or inspected or a substrate such as a silicon wafer or glass (or quartz) panel on which circuitry is to be formed and/or inspected. For example, the disclosed static pressure air bearing can be used to support a substrate in a photolithography apparatus. In such an application, the
25 movable part of the upper axis would typically include a wafer stage and/or chucking apparatus to hold the substrate.

 Fig. 1 is a perspective view showing an embodiment of a static pressure bearing mechanism according to the present invention. Figs. 2, 2(a), 2(b), 2(f), 2(i) and 2(k) are sectional views showing the junction of the movable part of the lower
30 axis and the fixed part of the upper axis of the static pressure bearing mechanism of Fig. 1.

 In both of the figures, air supply tubes 2 and air exhaust pipes 3 are connected with lower axis fixed parts 4. The supporting air that is supplied by the air supply

tubes 2 flows through inner air supply pipes (passages) 5 formed within the lower axis fixed parts 4, through air passages 6, and ultimately is supplied to each of air pads 7 to float lower axis movable parts 1. The inner air supply pipes can be seen in Fig. 2(l).

5 The supporting air supplied to each of the air pads 7 of the lower axis subsequently flows between the fixed parts 4 and the movable parts 1 and into air exhaust grooves 8 formed in the inner surface of the movable parts 1, which extend around the air pads 7 (see Fig. 2(h)). After entering the exhaust grooves 8, the air passes through inner air exhaust pipes (passages) 9 by way of air exhaust tunnels (passages) 20 formed within the lower axis fixed parts 4, and ultimately is
10 exhausted (via exhaust pipes 3) outside of the vacuum chamber. The inner air exhaust pipes can be seen in Fig. 2(j).

The air passages 6 within the lower axis fixed parts 4 branch off in mid course and are communicated with air supply communication grooves 13 formed within the lower axis movable parts 1 (see Fig. 2(h)). Further, air passages 19 formed within
15 upper axis fixed part 10 are connected with the air supply communication grooves 13 through air supply communication pipes (passages) 14 (see Fig. 2(h)). The lay-out of the air pad 7, air passage 6 opening and exhaust tunnel 20 openings on the upper surface of the lower axis fixed part 4 is shown in Fig. 2(g). Through this structure, a part of the supporting air supplied by the air supply tubes 2 is supplied to air pads 17
20 of the upper axis through the air supply communication grooves 13, the air supply communication pipes 14, and the air passages 19.

The supporting air supplied to the air pads 17 of the upper axis subsequently flows into air exhaust grooves 16, which are formed in movable part 15 of the upper axis. Although not specifically illustrated in Fig. 2, because the air exhaust
25 grooves 16 and the inner air exhaust pipes (passages) 18 formed within the upper axis fixed part 10 are connected through air exhaust tunnels (31 - see Fig. 3, which is a cross-sectional view of the fixed and movable parts of the upper axis) as is the case with the lower axis, the supporting air that flowed into the air exhaust grooves 16 is then exhausted outside of the vacuum chamber through the inner air exhaust pipe 18,
30 air exhaust communication pipes (passages) 12, air exhaust communication grooves 11 and the inner air exhaust pipes 9. In particular, the ends of tunnels 31 define apertures 31' in the surface of upper axis fixed part 10, which communicate with the grooves 16 in the upper axis movable part 15. The structure of pipes 18 and

passages 19 can be appreciated from Figs. 2(d) and 2(e). Fig. 2(c) shows the locations of the air pad 17 and tunnel apertures 31' on the surface of the upper axis fixed part 10.

Fig. 4 is a plan view of the inner surface of one side (of the 4 sides) of movable part 15 of the upper axis. As can be appreciated from Fig. 4, the air exhaust groove 16 extends around the circumference of the inner surface of the side of the movable part 15 so as to surround its corresponding air pad 17 (located on the fixed part 10 of the upper axis). Accordingly, all air expelled into the air pad 17 will be received by air exhaust groove 16, and prevented from entering the vacuum environment in which the air bearing is used. As the movable part 15 moves along the fixed part 10, the longitudinal legs 16a of the groove 16 remain in communication with the air exhaust tunnels 31 so that the exhausted air is transmitted through inner air exhaust pipes 18, air exhaust communication pipes 12, air exhaust communication grooves 11, inner air exhaust pipes 9, and ultimately exhausted through air exhaust pipes 3.

The inner surface of each of the four sides of the upper axis movable part 15 have exhaust grooves 16 similar to what is shown in Fig. 4. The inner surfaces of each of the four sides of the lower axis movable parts 1 have grooves 8 structured similar to grooves 16 (see Figs. 2(h), 5(a) and 5(b)). The grooves 8 and 16 can have a pattern other than what is shown in Fig. 4. For example, the end legs 16b can extend entirely across the inner surface, rather than stopping where they intersect the longitudinal legs 16a.

As another alternative, two grooves 16a and 16b can be provided in a modified upper axis movable part 15' as shown in Figs. 5(c)-5(e). Each of the grooves 16a, 16b communicates with groups of tunnel apertures 31b' and 31a', respectively, provided on the upper axis fixed part. This configuration also can include four air pads 17 on each surface of the upper axis fixed part. A similar arrangement can be provided for the lower axis.

In order to prevent the supporting air from flowing into the vacuum chamber, the movable parts 1 and 15 should remain overlapped with their corresponding air pads 7 and 17, respectively. This is illustrated in Figs. 2(b) and Figs. 5(a)-5(e). Thus, the range of motion of the movable parts 1 and 15 is somewhat limited. However, by placing the air pads 7, 17 and the exhaust tunnels 20, 31 near the central portion of

their corresponding fixed parts 4 and 10, respectively, a sufficiently large range of motion is achievable. Thus, a bearing mechanism usable in a vacuum environment is realized because, with respect to both the lower and upper axes, the supporting air does not flow into the vacuum chamber by virtue of the above mechanism.

5 Figs. 6(a)-6(c) and 7(a)-7(c) illustrate embodiments in which the air pads are formed in the movable parts of the lower and upper axes. The arrangements of Figs. 6(a)-7(c) keep the bearing system in better balance during movement of the movable parts of the lower and upper axes. In these embodiments, the structures relating to the exhaust air is the same as in the Fig. 2 embodiment.

10 As shown in Figs. 6(a) and 7(a) the movable part 1' of the lower axis includes air pads 7'. Supply air is provided to the air pads 7' via passages 27' provided in the movable parts 1'. The passages 27' receive the supply air from air supply communication grooves 13 which, as discussed previously, communicate with inner air supply pipes 5.

15 As can be seen from Figs. 6(c) and 7(c), the surfaces of the upper axis fixed part 10-1 or 10-2 include exhaust tunnel apertures 31' as in the previous embodiments, but do not include air pads. Rather, an air supply aperture 19', which is an outlet of air passages 19 in the upper axis fixed parts, is provided:

20 In the embodiment of Figs. 6(a)-6(c), the supply air emitted from apertures 19' is received in air supply communication grooves 37' of the movable part 15-1. The air then travels through air passages 19" in the movable part 15-1 until reaching the air pads 17-1. In the embodiment of Figs. 7(a)-7(c), the air from apertures 19' is emitted into air supply communication grooves 37", and then into the air pads 17-2 of the upper axis movable part 15-2.

25 Because of the design of a static pressure air bearing having two axes usable in a vacuum environment in which the air exhaust pipes are connected only with the fixed parts of the lower axis and need not be connected with the movable parts of the bearing mechanism, air exhaust pipes having a large bore diameter do not adversely affect the bearing performance, e.g., rectilinear feeding accuracy.

30 The supporting air and the exhaust air for the upper axis can be conveyed to the upper axis through one or both of the lower axis movable parts 1. The term "air" as used herein is intended to cover any fluid that is suitable for use in a static air bearing, and is not intended to be limited to strictly atmospheric air.

While the present invention has been described with reference to preferred embodiments thereof, it is to be understood that the invention is not limited to the disclosed embodiments or constructions. To the contrary, the invention is intended to cover various modifications and equivalent arrangements. In addition, while the various elements of the disclosed invention are shown in various combinations and configurations, which are exemplary, other combinations and configurations, including more, less or only a single element, are also within the spirit and scope of the invention.

WHAT IS CLAIMED IS:

1. A static pressure air bearing comprising:
a first axis having a fixed part and a movable part that is movably mounted to the fixed part, the fixed part including a first exhaust passage; and
5 a second axis having a fixed part and a movable part that is movably mounted to the fixed part of the second axis, the fixed part of the second axis attached to the movable part of the first axis and including a second exhaust passage in communication with the first exhaust passage.
2. A static pressure air bearing according to claim 1, wherein the movable
10 part of the first axis includes an exhaust communication passage that communicates the first exhaust passage of the first axis fixed part with the second exhaust passage of the second axis fixed part.
3. A static pressure air bearing according to claim 2, wherein supporting
15 air that forms air pads between the fixed and movable parts of the first axis and between the fixed and movable parts of the second axis is exhausted through the first and second exhaust passages.
4. A static pressure air bearing according to claim 1, wherein supporting
20 air that forms air pads between the fixed and movable parts of the first axis and between the fixed and movable parts of the second axis is exhausted through the first and second exhaust passages.
5. A static pressure air bearing according to claim 4, wherein external
25 surfaces of the fixed parts of the first and second axes include exhaust orifices that communicate with respective ones of the first and second exhaust passages, and internal surfaces of the movable parts of the first and second axes include air exhaust grooves that communicate with respective ones of the exhaust orifices in the fixed parts of the first and second axes.
6. A static pressure air bearing according to claim 1, wherein external
30 surfaces of the fixed parts of the first and second axes include exhaust orifices that communicate with respective ones of the first and second exhaust passages, and internal surfaces of the movable parts of the first and second axes include air exhaust grooves that communicate with respective ones of the exhaust orifices in the fixed parts of the first and second axes.

7. A static pressure air bearing according to claim 2, wherein external surfaces of the fixed parts of the first and second axes include exhaust orifices that communicate with respective ones of the first and second exhaust passages, and internal surfaces of the movable parts of the first and second axes include air exhaust
5 grooves that communicate with respective ones of the exhaust orifices in the fixed parts of the first and second axes.

8. A static pressure air bearing according to claim 7, wherein the fixed part of the first axis includes a first air supply passage, and the fixed part of the second axis includes a second air supply passage in communication with the first air supply
10 passage.

9. A static pressure air bearing according to claim 1, wherein the fixed part of the first axis includes a first air supply passage, and the fixed part of the second axis includes a second air supply passage in communication with the first air supply
15 passage.

10. A static pressure air bearing according to claim 2, wherein the fixed part of the first axis includes a first air supply passage, and the fixed part of the second axis includes a second air supply passage in communication with the first air supply
20 passage.

11. A static pressure air bearing according to claim 4, wherein the fixed part of the first axis includes a first air supply passage, and the fixed part of the second axis includes a second air supply passage in communication with the first air supply
25 passage.

12. A static pressure air bearing according to claim 11, wherein the movable part of the first axis includes an air supply communication passage that communicates the first air supply passage of the first axis fixed part with the second
30 air supply passage of the second axis fixed part.

13. A static pressure air bearing according to claim 8, wherein the movable part of the first axis includes an air supply communication passage that communicates the first air supply passage of the first axis fixed part with the second air supply
35 passage of the second axis fixed part.

14. A static pressure air bearing according to claim 9, wherein the movable part of the first axis includes an air supply communication passage that communicates

the first air supply passage of the first axis fixed part with the second air supply passage of the second axis fixed part.

15 15. A static pressure air bearing according to claim 10, wherein the movable part of the first axis includes an air supply communication passage that communicates the first air supply passage of the first axis fixed part with the second air supply passage of the second axis fixed part.

16. A method of making a static pressure air bearing comprising the steps of:

10 providing a first axis having a fixed part and a movable part that is movably mounted to the fixed part, the fixed part including a first exhaust passage; and

15 providing a second axis having a fixed part and a movable part that is movably mounted to the fixed part of the second axis, the fixed part of the second axis attached to the movable part of the first axis and including a second exhaust passage in communication with the first exhaust passage.

17. A method according to claim 16, wherein the movable part of the first axis includes an exhaust communication passage that communicates the first exhaust passage of the first axis fixed part with the second exhaust passage of the second axis fixed part.

20 18. A method according to claim 16, wherein supporting air that forms air pads between the fixed and movable parts of the first axis and between the fixed and movable parts of the second axis is exhausted through the first and second exhaust passages.

25 19. A method according to claim 16, wherein external surfaces of the fixed parts of the first and second axes include exhaust orifices that communicate with respective ones of the first and second exhaust passages, and internal surfaces of the movable parts of the first and second axes include air exhaust grooves that communicate with respective ones of the exhaust orifices in the fixed parts of the first and second axes.

30 20. A method according to claim 16, wherein the fixed part of the first axis includes a first air supply passage, and the fixed part of the second axis includes a second air supply passage in communication with the first air supply passage.

21. A method according to claim 20, wherein the movable part of the first axis includes an air supply communication passage that communicates the first air supply passage of the first axis fixed part with the second air supply passage of the second axis fixed part.

5 22. A method of exhausting supporting air from a two-axis static pressure air bearing that includes a first axis having a fixed part and a movable part that is movably mounted to the fixed part, and a second axis having a fixed part and a movable part that is movably mounted to the fixed part of the second axis, the fixed part of the second axis attached to the movable part of the first axis, the method
10 comprising the step of:

exhausting the supporting air from air pads located between the fixed and movable parts of the second axis through a first exhaust passage located in the fixed part of the first axis and a second exhaust passage located in the fixed part of the second axis, the second exhaust passage in communication with the first exhaust
15 passage.

23. A method according to claim 22, wherein the movable part of the first axis includes an exhaust communication passage that communicates the first exhaust passage of the first axis fixed part with the second exhaust passage of the second axis fixed part.

20 24. A method according to claim 22, wherein external surfaces of the fixed parts of the first and second axes include exhaust orifices that communicate with respective ones of the first and second exhaust passages, and internal surfaces of the movable parts of the first and second axes include air exhaust grooves that communicate with respective ones of the exhaust orifices in the fixed parts of the first
25 and second axes.

25. A method according to claim 22, further comprising the step of supplying the supporting air to the air pads between the fixed and movable parts of the second axis through a first air supply passage located in the fixed part of the first axis and a second air supply passage located in the fixed part of the second axis and in
30 communication with the first air supply passage.

26. A method according to claim 25, wherein the movable part of the first axis includes an air supply communication passage that communicates the first air

supply passage of the first axis fixed part with the second air supply passage of the second axis fixed part.

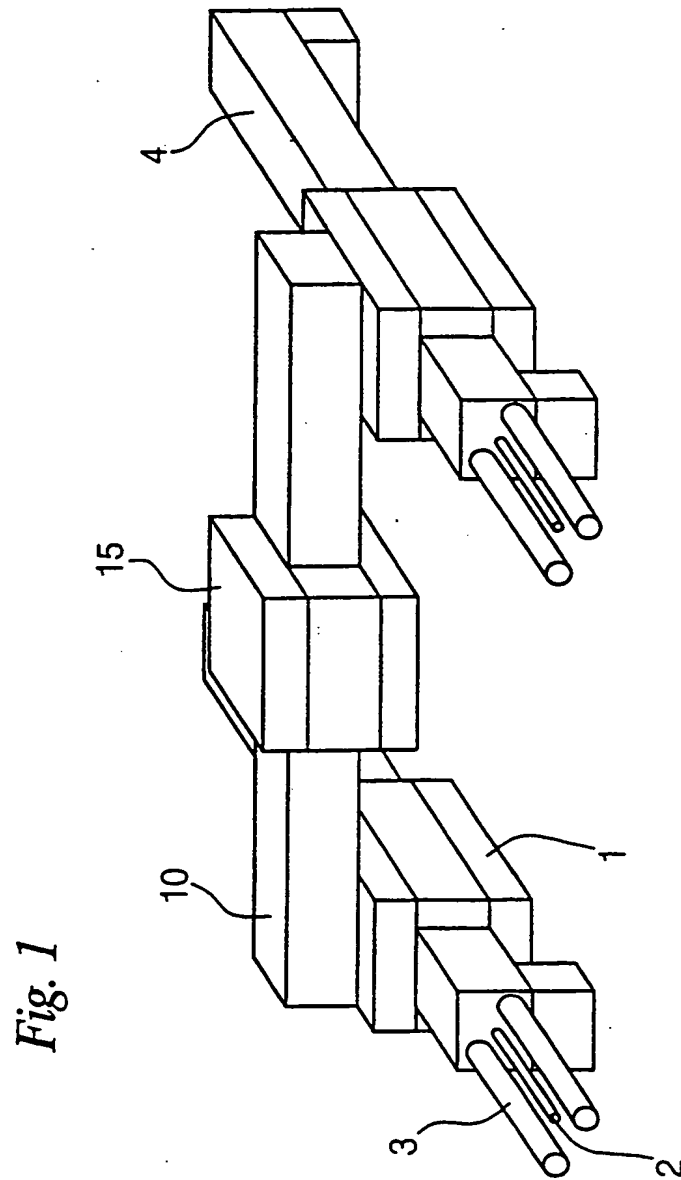
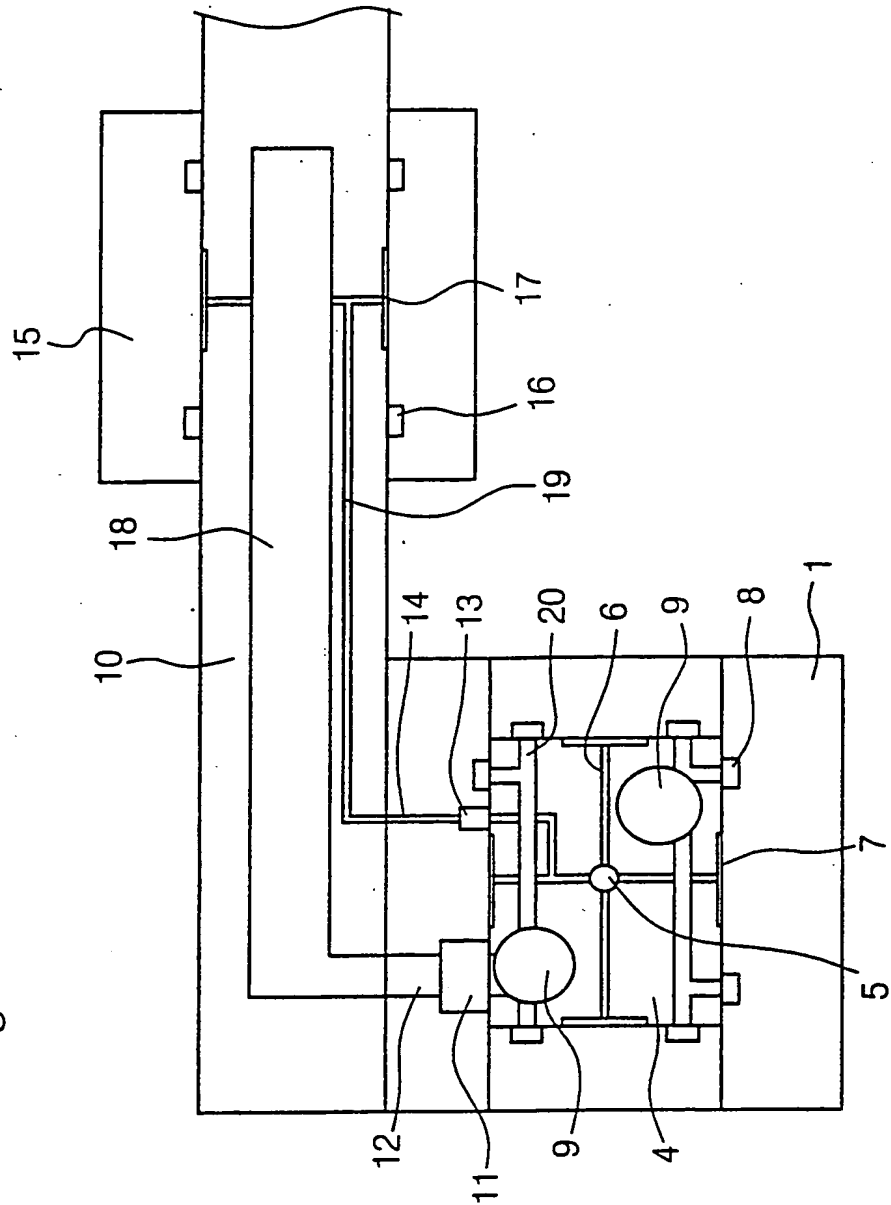


Fig. 2



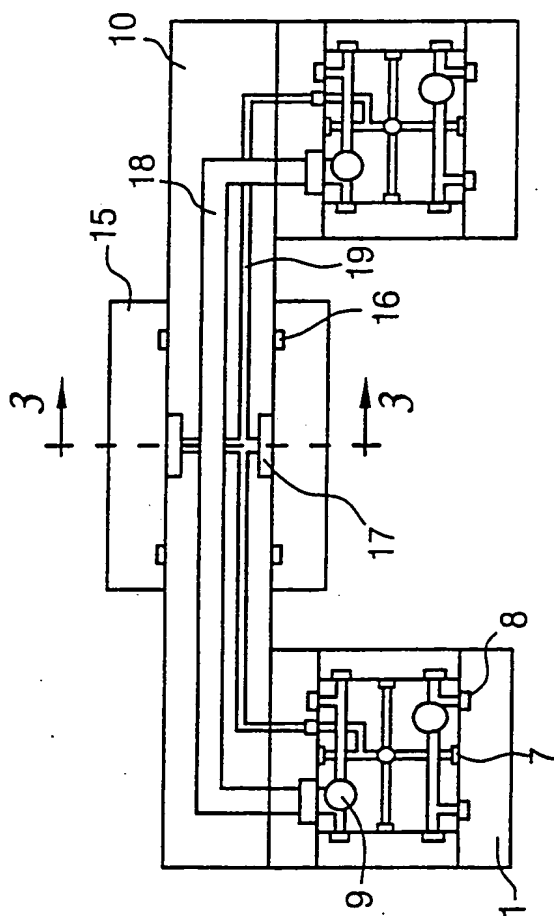


Fig. 2(a)

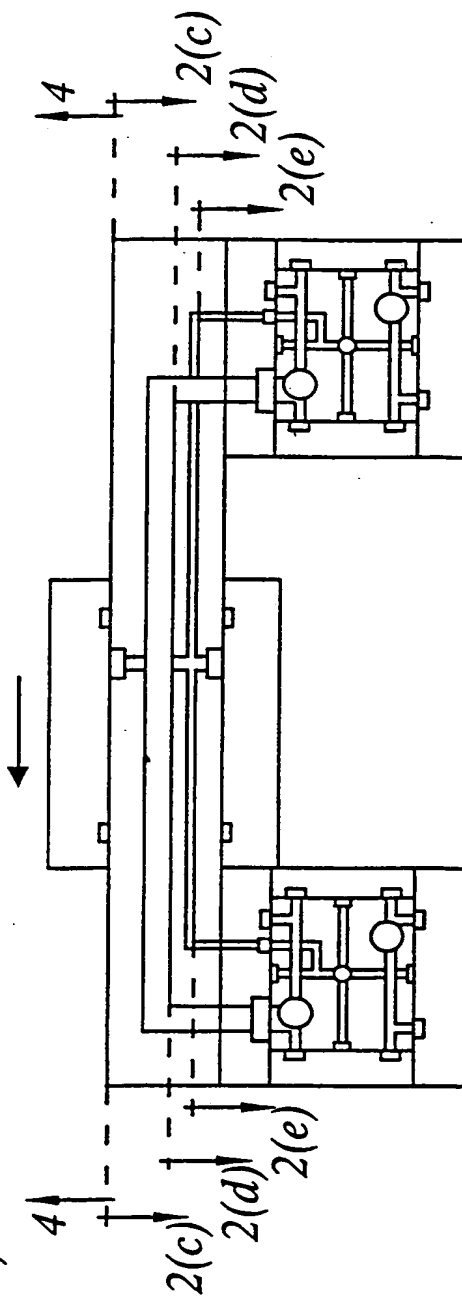


Fig. 2(b)

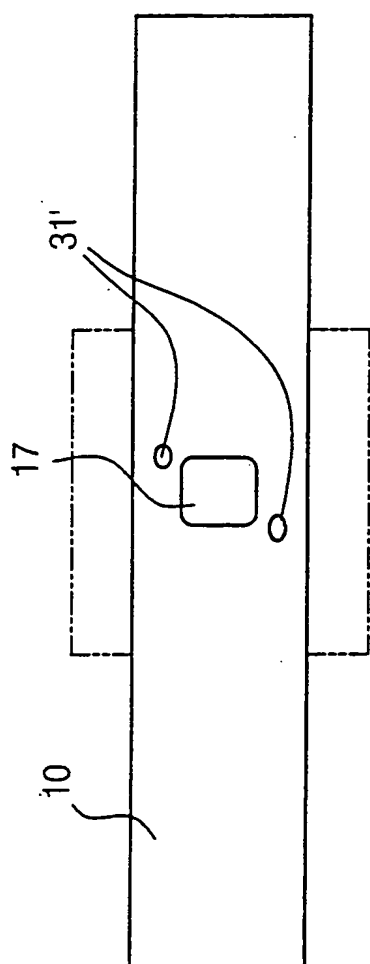


Fig. 2(c)

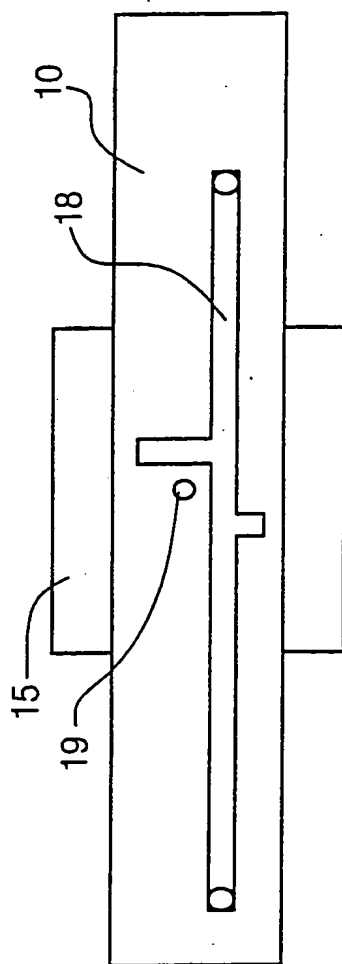


Fig. 2(d)

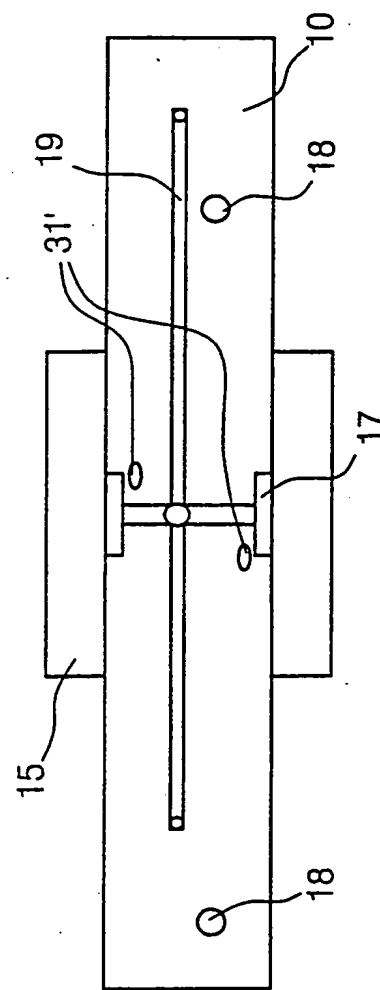


Fig. 2(e)

5/14

Fig. 2(f)





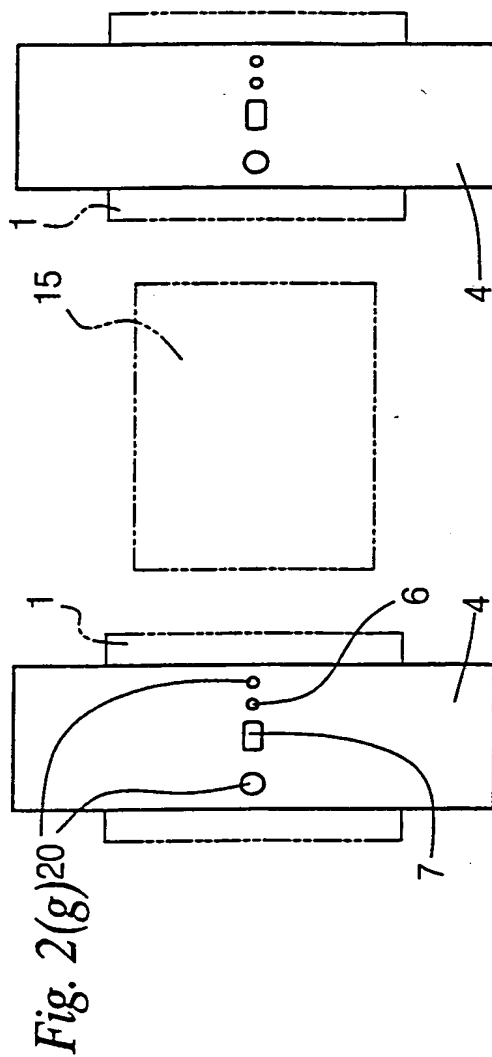




Fig. 2(h)

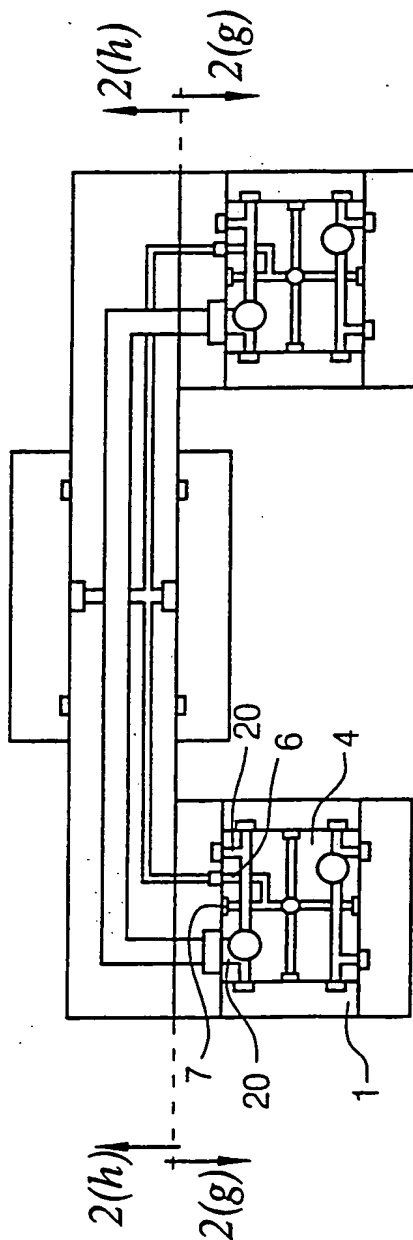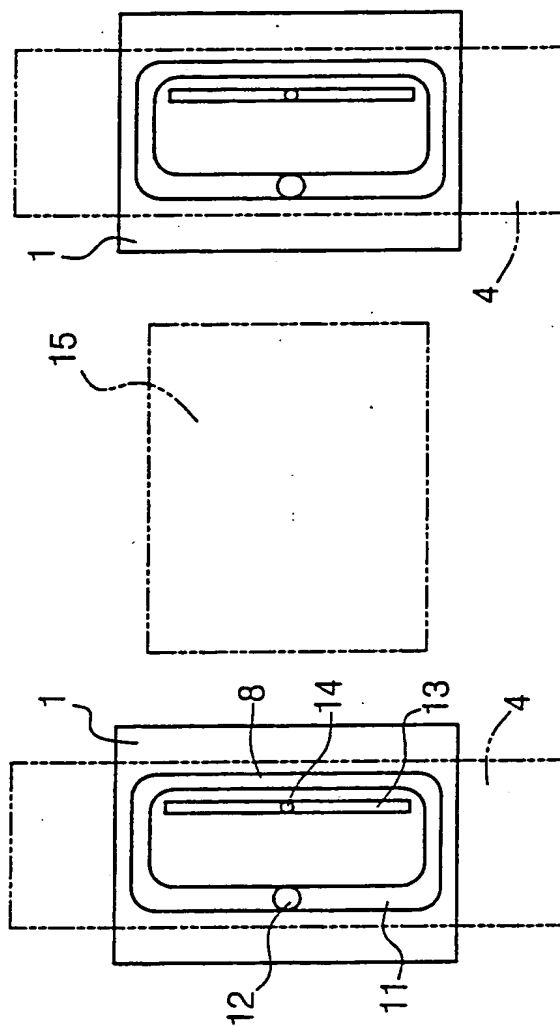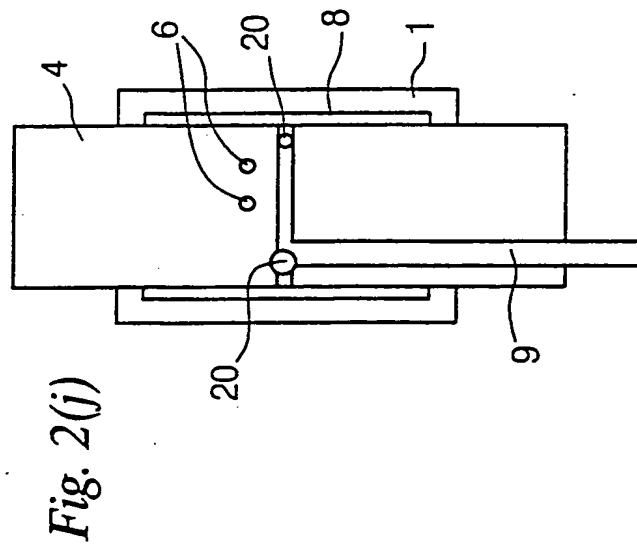

7/14

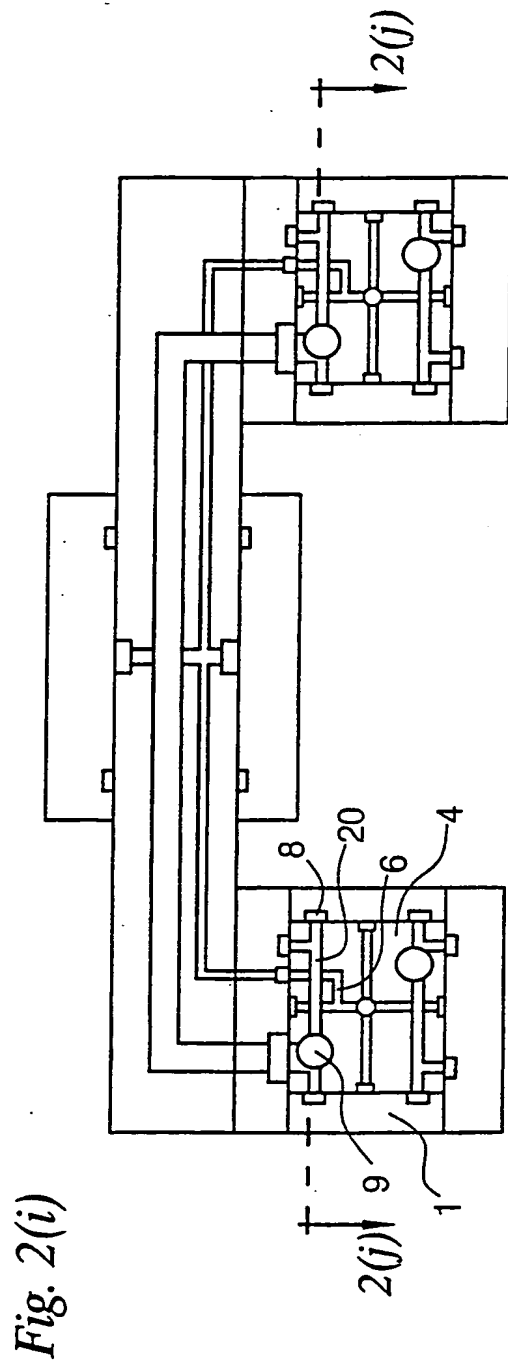

8/14

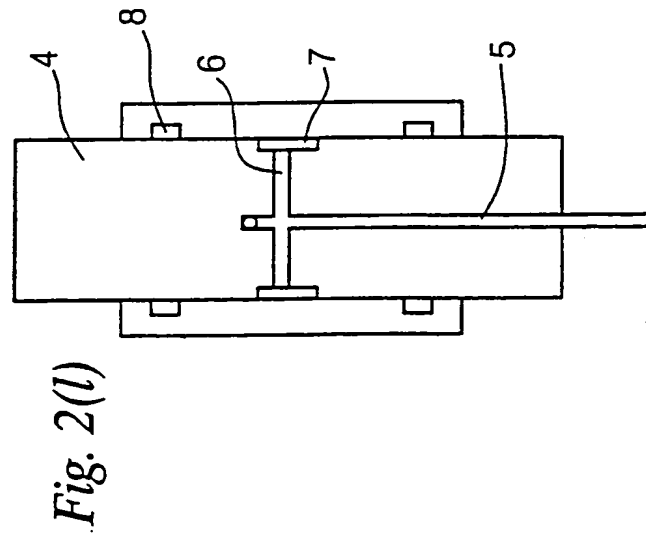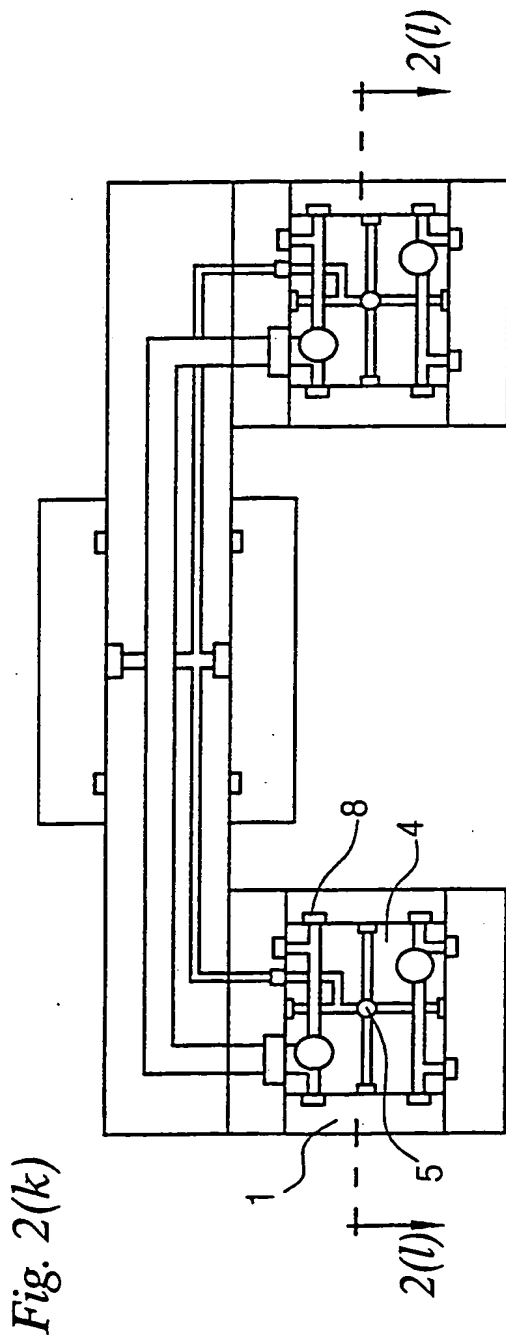

9/14

Fig. 3

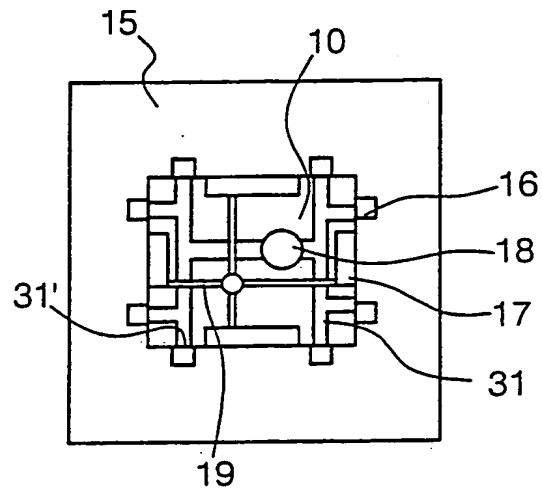
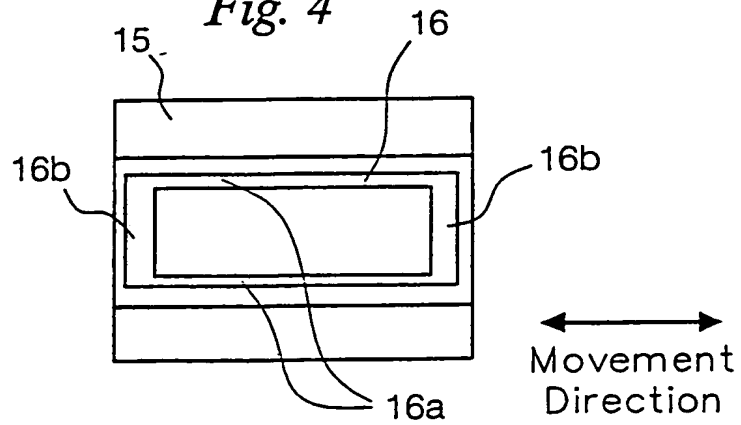


Fig. 4



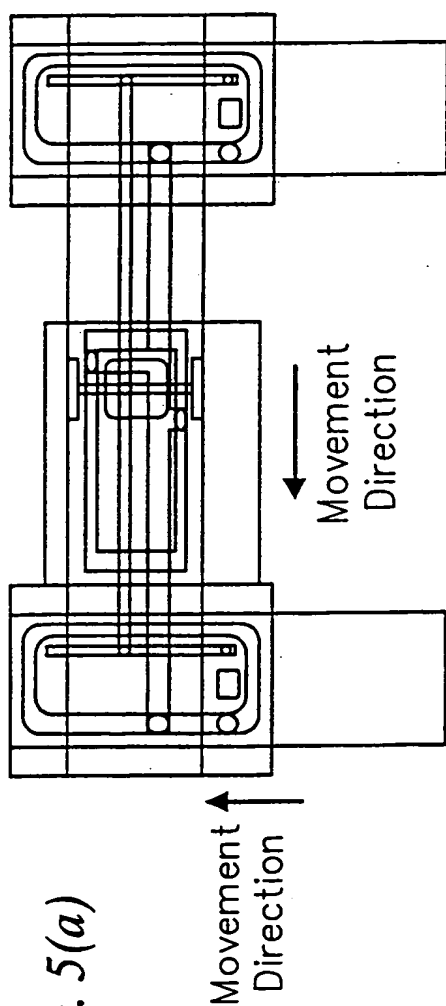


Fig. 5(a)

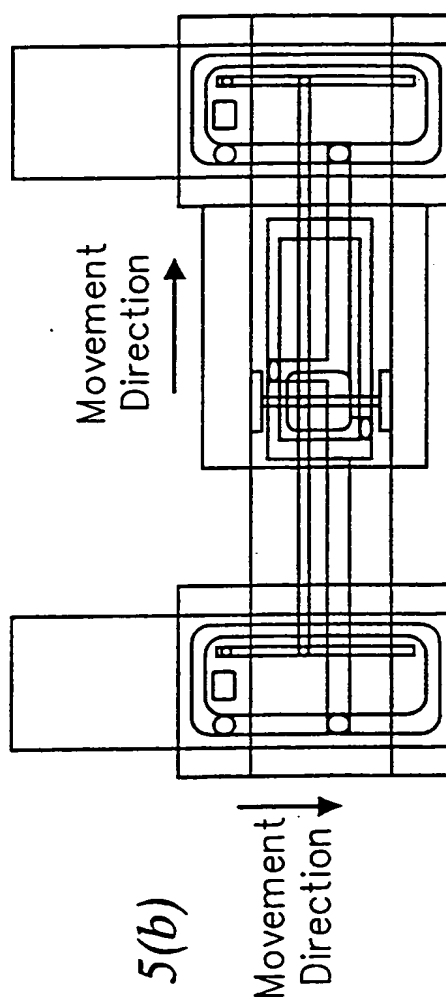


Fig. 5(b)

11/14

Fig. 5(c)

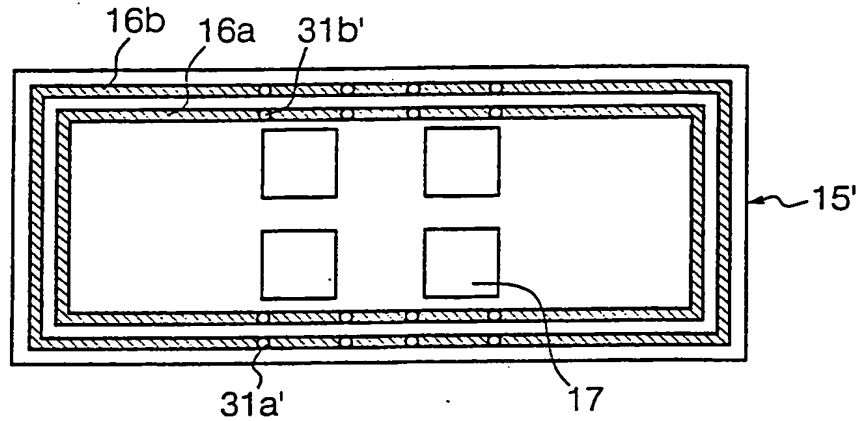


Fig. 5(d)


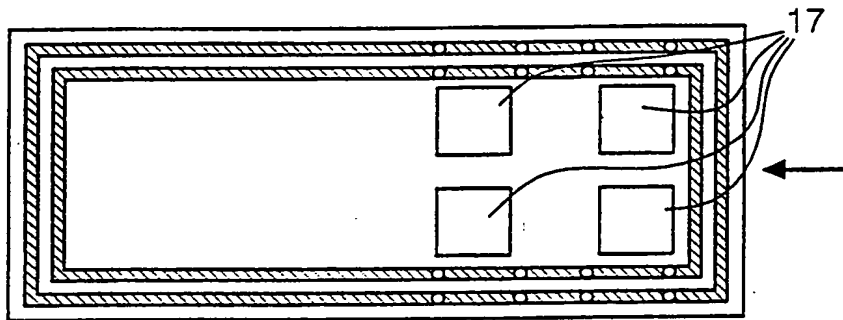


Fig. 5(e)

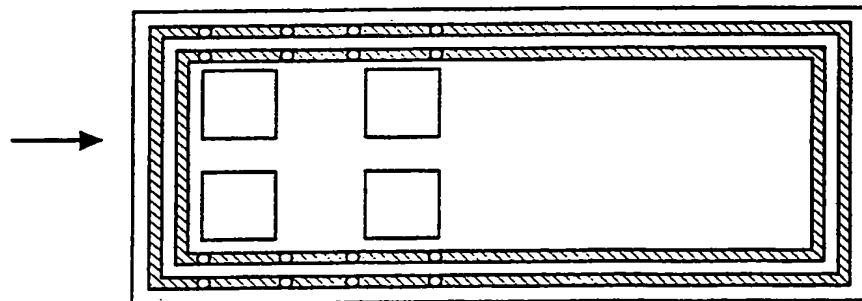

12/14

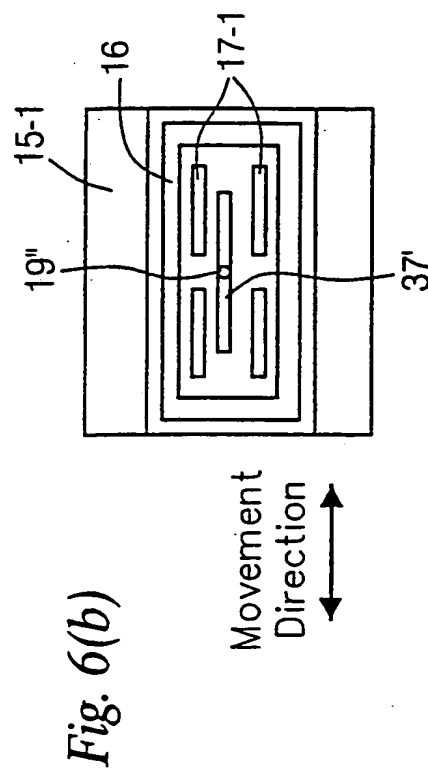
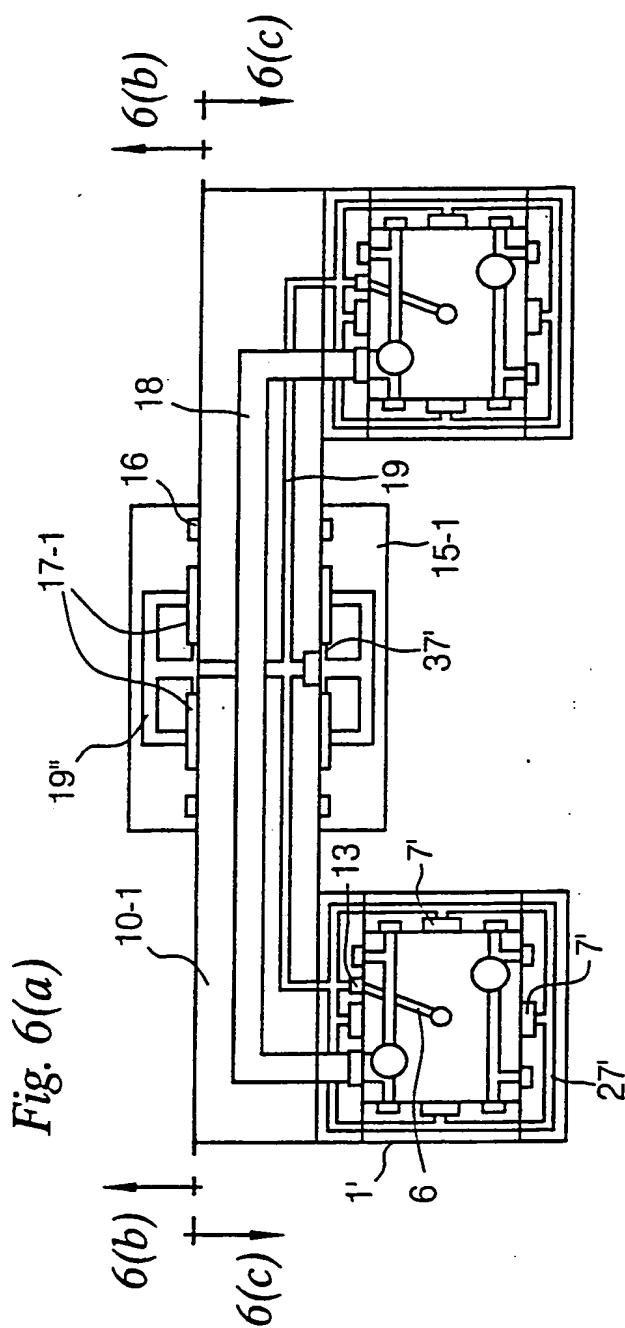


Fig. 7(c)




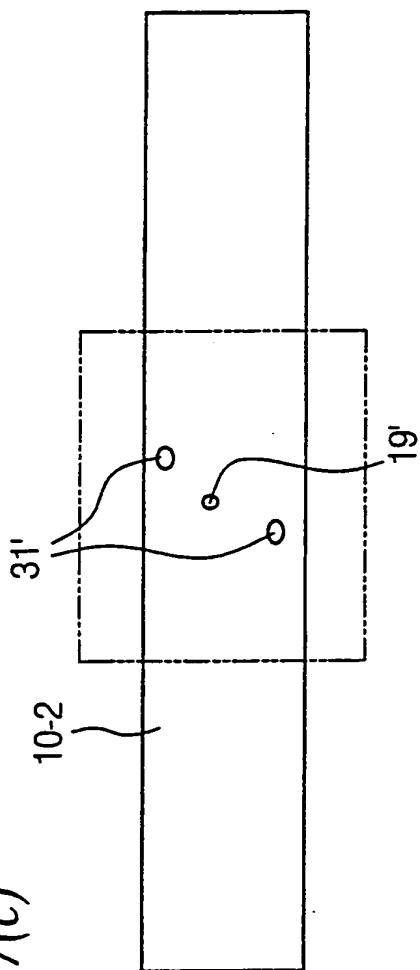


Fig. 6(c)

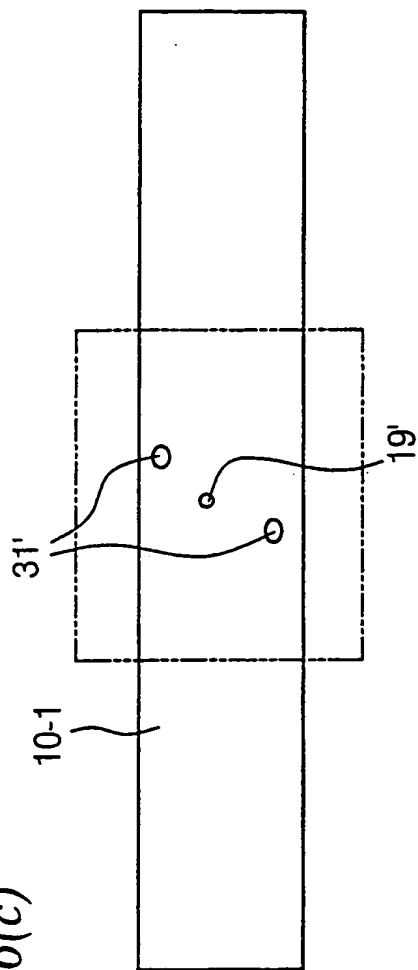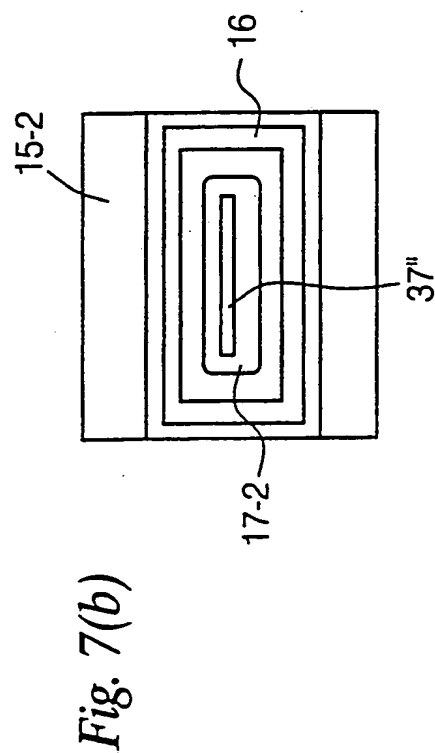

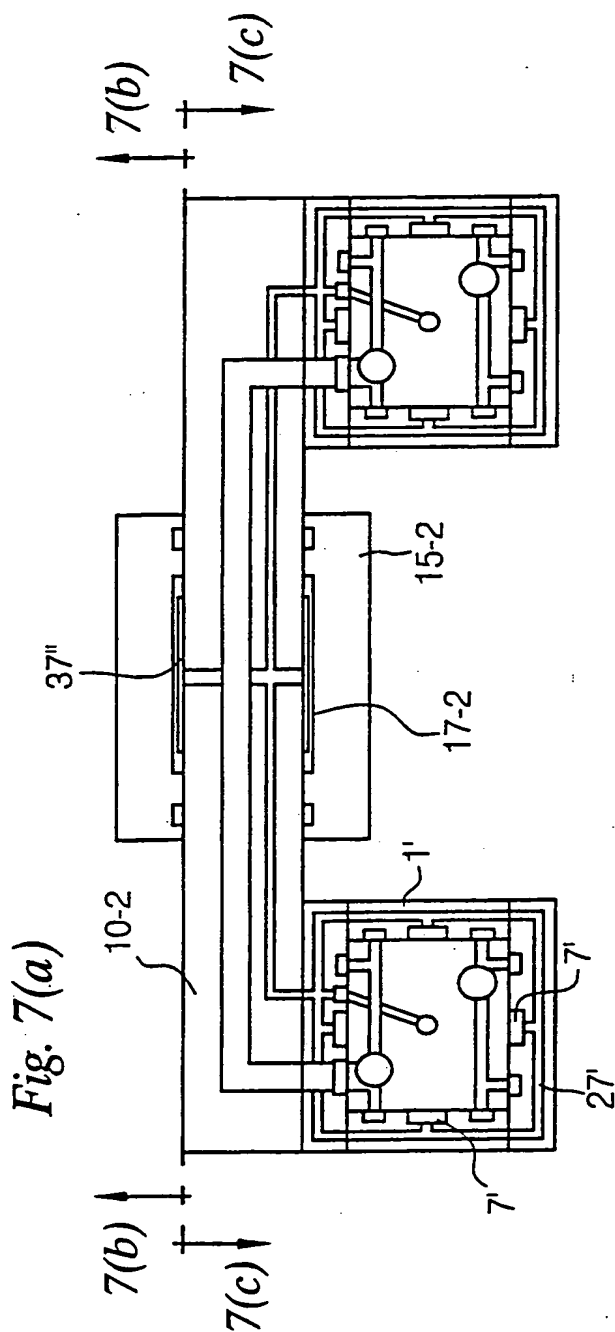

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/04223

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : F16C 32/06

US CL : 384/9, 12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 384/9, 12, 42, 13, 7

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| A | US 5,760,564 A (NOVAK) 02 JUNE 1998, see entire document. | 1 |
| A | US 5,839,324 A (HARA) 24 NOVEMBER 1998, see entire document. | 1 |

☐

Further documents are listed in the continuation of Box C.

☐

See patent family annex.

| | |
|---|--|
| * Special categories of cited documents: | *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| *A* document defining the general state of the art which is not considered to be of particular relevance | *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| *E* earlier document published on or after the international filing date | *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | *Δ* document member of the same patent family |
| *O* document referring to an oral disclosure, use, exhibition or other means | |
| *P* document published prior to the international filing date but later than the priority date claimed | |

Date of the actual completion of the international search

03 MAY 2000

Date of mailing of the international search report

25 MAY 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

LENARD A. FOOTLAND *Diane Smith*

Telephone No. (703) 308-2683